

CURRENT 4 Ampere
VOLTAGE RANG 800~1000 Volts

GLASS PASSIVATED SURFACE MOUNT BRIDGE RECTIFIER RECTIFIERS


ULBF408-ULBF410

ULBF408-ULBF410

Features:

Glass Passivated Chip Junction
Reverse Voltage - 100 to 1000 V
Forward Current - 4
High Surge Current Capability
Designed for Surface Mount Application

ULBF-4



PINNING

PIN	DESCRIPTION
1	Output Anode (+)
2	Output Cathode (-)
3	Input Pin (~)
4	Input Pin (~)

Absolute Maximum Ratings (Ta=25°C unless otherwise noted)

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Parameter	Symbols	ULBF408	ULBF410	Units
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	800	1000	V
Maximum RMS voltage	V _{RMS}	560	700	V
Maximum DC Blocking Voltage	V _{DC}	800	1000	V
Average Rectified Output Current	I _O	4.0		A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}		200	A
I ² t Rating for Fusing	I ² t	166		A ² S
Maximum Forward Voltage at 1.0 A	V _F	0.83 (typ.)		V
Maximum Forward Voltage at 6.0 A	V _F	1.0		V
Maximum DC Reverse Current @T _A =25 °C at Rated DC Blocking Voltage @T _A =125 °C	I _R	5 100		µA
Typical Junction Capacitance (Note1)	C _j	60		pF
Typical Thermal Resistance (Note2)	R _{θJA} R _{θJC} R _{θJL}	60 10 12		°C/W
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150		°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" (3.81×3.81 cm) copper pad.

CURRENT 4 Ampere
VOLTAGE RANG 800~1000 Volts

GLASS PASSIVATED SURFACE MOUNT BRIDGE RECTIFIER RECTIFIERS
ULBF408-ULBF410

Typical Characteristics

Fig.1 Average Rectified Output Current Derating Curve

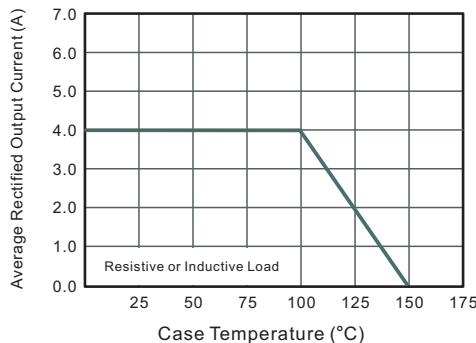


Fig.2 Typical Reverse Characteristics

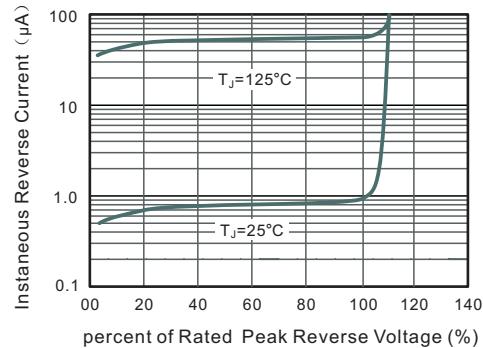


Fig.3 Typical Instantaneous Forward Characteristics

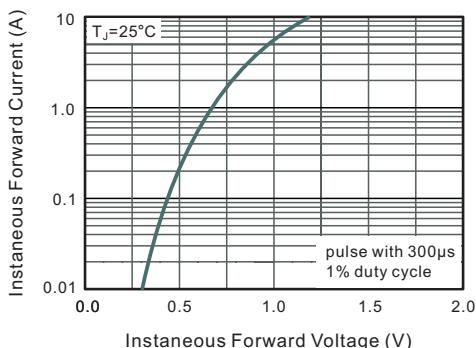


Fig.4 Typical Junction Capacitance

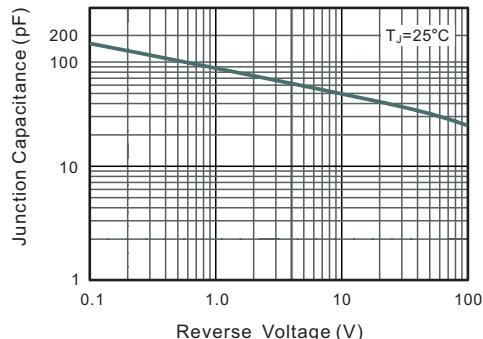


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


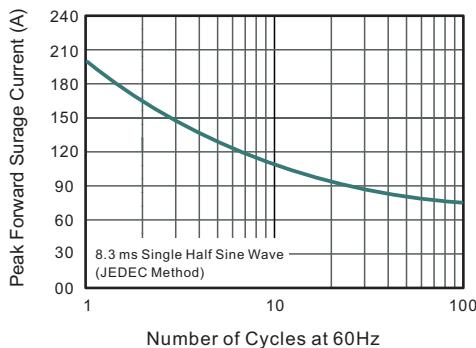



Fig.6- Typical Transient Thermal Impedance

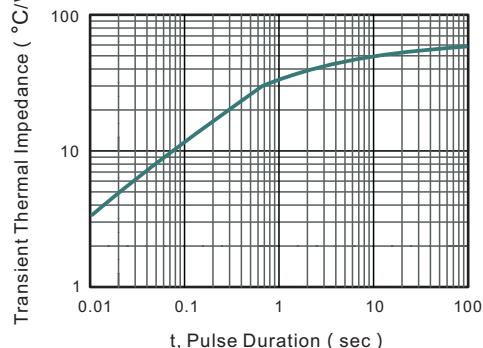

CURRENT 4 Ampere
VOLTAGE RANG 800~1000 Volts

GLASS PASSIVATED SURFACE MOUNT BRIDGE RECTIFIER RECTIFIERS
ULBF408-ULBF410


ULBF

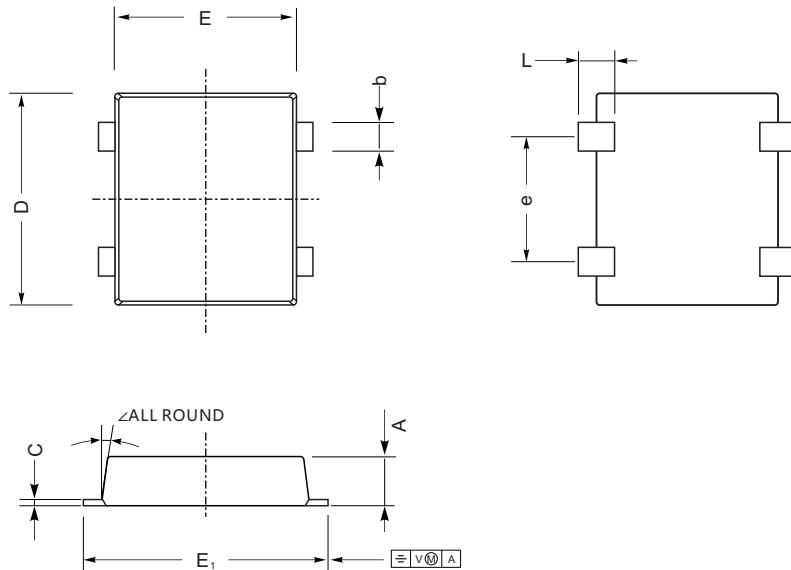

ULBF mechanical data

UNIT		A	C	D	E	E ₁	L	e	b	∠
mm	max	1.75	0.55	9.8	8.8	10.2	1.25	5.3	1.55	10°
	min	1.35	0.25	9.4	8.4	9.8	0.85	4.9	1.25	
mil	max	68	21.6	385	346	401	49	209	61	10°
	min	53	9.8	370	330	385	33	193	49	

The recommended mounting pad size

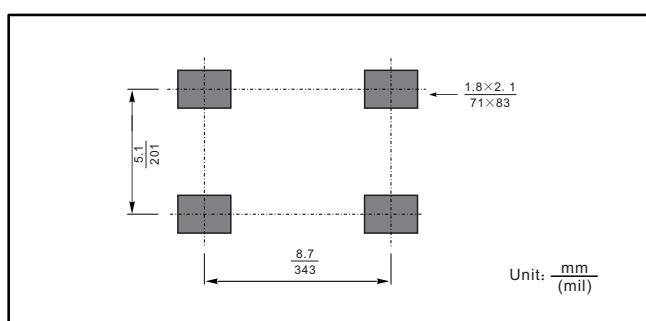

Marking

Type number	Marking code
ULBF608	ULBF608
ULBF610	ULBF610